




Akira

Ceiling Light

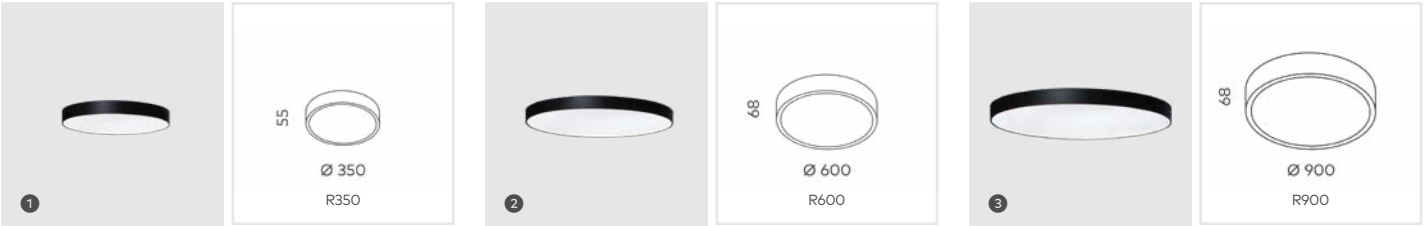

		LED Power	Lumens (at 3000K)	Beam	Weight	IP Rating	Class Rating
1	R350 Surface Mounted	28W (750mA)	2755lm	110°	1.8kg	IP54	Class II
2	R600 Surface Mounted	60W (2x 750mA)	4100lm	110°	7.7kg	IP20	Class I
3	R900 Surface Mounted	90W (3x 750mA)	7512lm	110°	15.4kg	IP20	Class I

Key Information		Design		Performance		Driver	
Mounting	Ceiling Surface	Product Family	Akira	Lumen efficacy	Up to 112lm/W	Phase Cut	Built in
Finish	<input checked="" type="checkbox"/> Textured Black <input type="checkbox"/> Textured White		Powder Coated Aluminium, Polycarbonate Diffuser	CRI (Ra/R9)	80+ (R9: >0)	DALI	Remote
LED CCT	<input checked="" type="checkbox"/> 3000K <input type="checkbox"/> 4000K	Material		UGR	<19	Bluetooth	Remote
Warranty	5 Year			Lifetime (Ta 25°C)	>54,000h L90B10		
				Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		

