




Shift G2

Collection

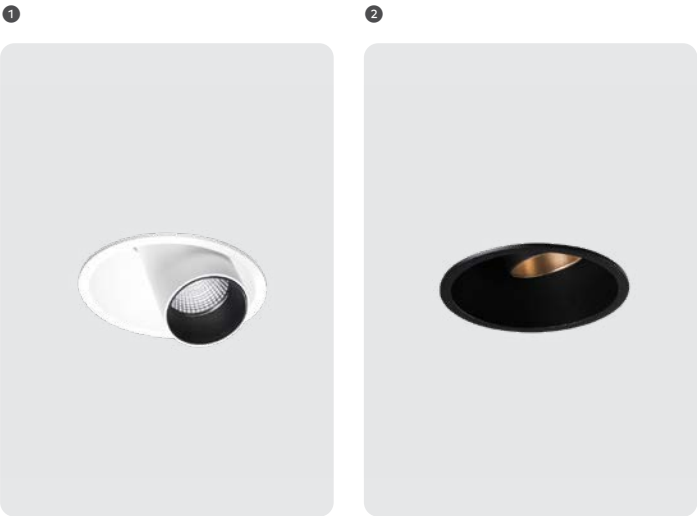

1	Shift Out G2 Downlight	Page 105	13W	See unios.com/shiftout for more details
2	Shift In G2 Downlight	Page 109	13W	See unios.com/shiftin for more details




Shift Out G2

Downlight



		LED Power	Lumens (at 3000K)	Beam	Weight
1	Shift Out G2	13W (350mA)	879lm	20° 30° 40°	510g

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	Shift	Lumen efficacy	Up to 60lm/W	Phase Cut	Remote
Finish	<div><div></div> Textured Black</div>	Adjustability	355° Rotation, 30° Tilt	CRI (Ra/R9)	92+ (R9: >50)	DALI	Remote
	<div><div></div> Textured White</div>			UGR	<13	Bluetooth	Remote
	<div><div></div> Textured Black/Gold</div>	Material	Powder Coated Aluminium	Lifetime (Ta 25°C)	>55,000h L90B10		
	<div><div></div> Textured White/Gold</div>			Ambient Temperature Range	10°- 30°C		
	<div><div></div> Textured Black/White</div> <div><div></div> Textured White/Black</div>			SDCM	≤2		
LED CCT	<div><div></div> 2700K</div> <div><div></div> 3000K</div> <div><div></div> 4000K</div>	IP Rating	IP20	COI Compliance model requirements	4000K		
Warranty	5 Year	Class Rating	Class II				
		Insulation Rating	IC				

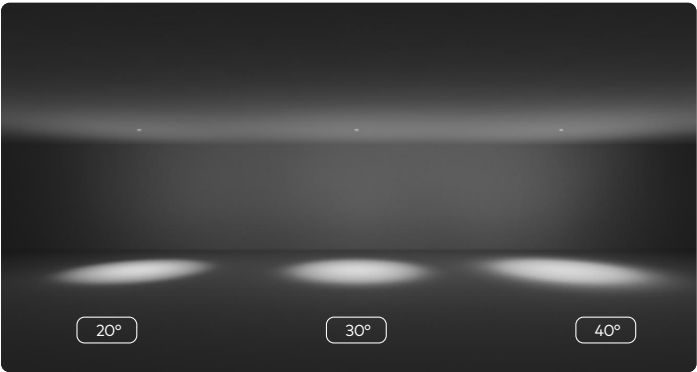

Available Accessories
Linear Lens (for elliptical beams)
Honeycomb Lens (for reduced glare)
Softening Lens (for 40°)





Shift Out G2

Downlight




Shift Out
Downlight
Textured White
Gage Roads




Shift In G2

Downlight

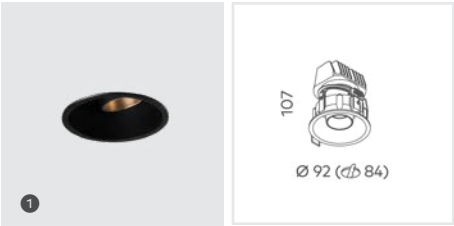


		LED Power	Lumens (at 3000K)	Beam	Weight
1	Shift In G2	13W (350mA)	921lm	20° 30° 40°	570g

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	Shift	Lumen efficacy	Up to 60lm/W	Phase Cut	Remote
Finish	■ Textured Black	Adjustability	2-axis 30° Tilt	CRI (Ra/R9)	92+ (R9: >50)	DALI	Remote
	□ Textured White	Material	Powder Coated Aluminium	UGR	<13	Bluetooth	Remote
	■ Textured Black/Gold			Lifetime (Ta 25°C)	>55,000h L90B10		
	■ Textured White/Gold	IP Rating	IP20	Ambient Temperature Range	10°- 30°C		
	■ Textured Black/White	Class Rating	Class II	SDCM	≤2		
	□ Textured White/Black	Insulation Rating	CA90	COI Compliance model requirements	4000K		
LED CCT	■ 2700K ■ 3000K ■ 4000K						
Warranty	5 Year						

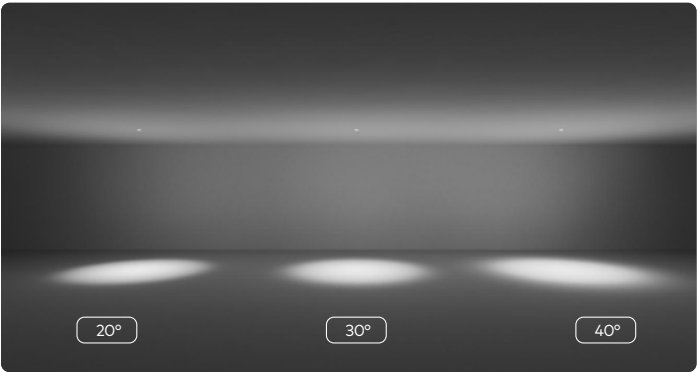

Available Accessories
Linear Lens (for elliptical beams)
Honeycomb Lens (for reduced glare)
Softening Lens (for 40°)





Shift In
Downlight
Textured White/Black
JartB House

Shift In
Downlight
Textured White
BOHO Office

Shift In G2

Downlight

