




Athena

Bollard Light

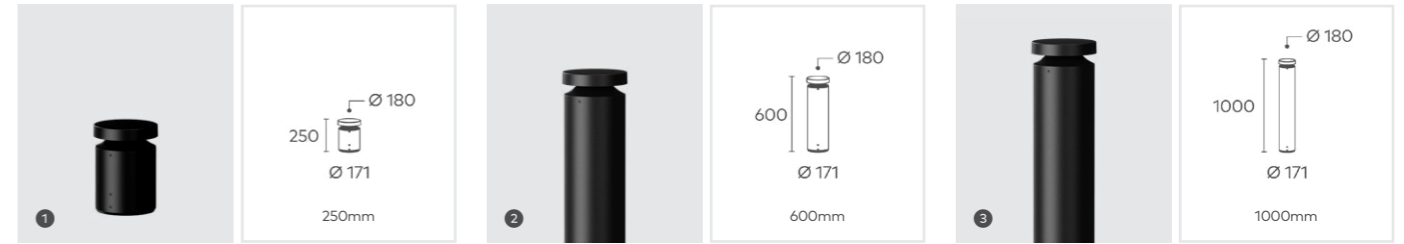



		LED Power	Lumens (at 3000K)	Beam	Weight	UWLR
1 2 3	180 Bollard	12W (600mA)	421lm	40° x 180°	2.5 / 4.0 / 6.3kg	2%
1 2 3	360 Bollard	24W (600mA)	917lm	40° x 360°	2.5 / 4.0 / 6.3kg	2%

Key Information		Design		Performance		Driver	
Mounting	Surface Mounted	Product Family	Athena	Lumen Efficacy	Up to 41lm/W	Non-Dim	Built-in
Finish	<ul style="list-style-type: none"> ■ Textured Black ■ PC Amber ■ 2700K ■ 3000K 	Material	TetraCoat Aluminium	CRI (Ra/R9)	90+ (R9: >50)	DALI	Built-in
LED CCT		CMS Corrosion Protection System	C4	Lifetime (Ta 40°C)	>50,000h L90B10		
Warranty	7 Years	IP Rating	IP66	Operating Ambient Temperature	-10°- 35°C		
		IK Rating	IK10	SDCM	≤3		

Learn about the Athena Collection in more detail.

Visit the website to view product information or download the brochure.

unios.com/athena

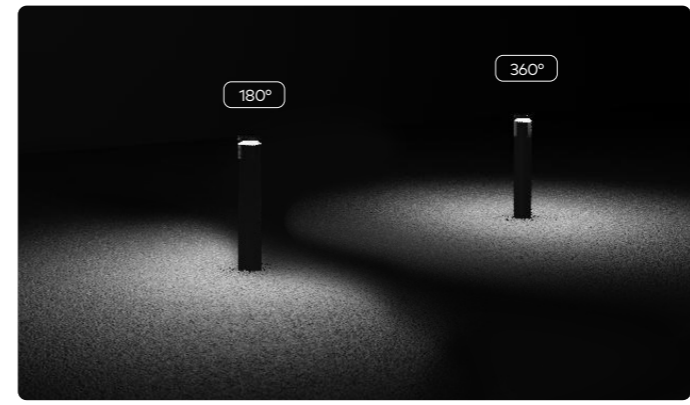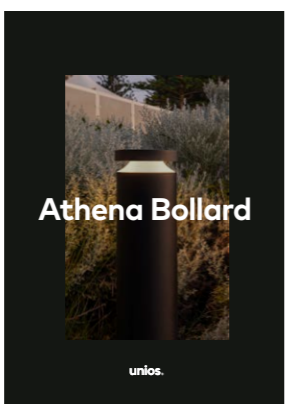

Available Accessories

- Concrete Anchor
- Sky Shield Accessory

